


This is a diagram and material list for the ladders to be used in the Dinghy Wells. Prior to installation, please complete the Dinghy Well Ladder Agreement which can be obtained from the Dinghy Well Chairman.

## DINGHY WELL LADDER

### FRONT VIEW

Ladder and underbracing fabricated from Wolmanized 2 x 4's

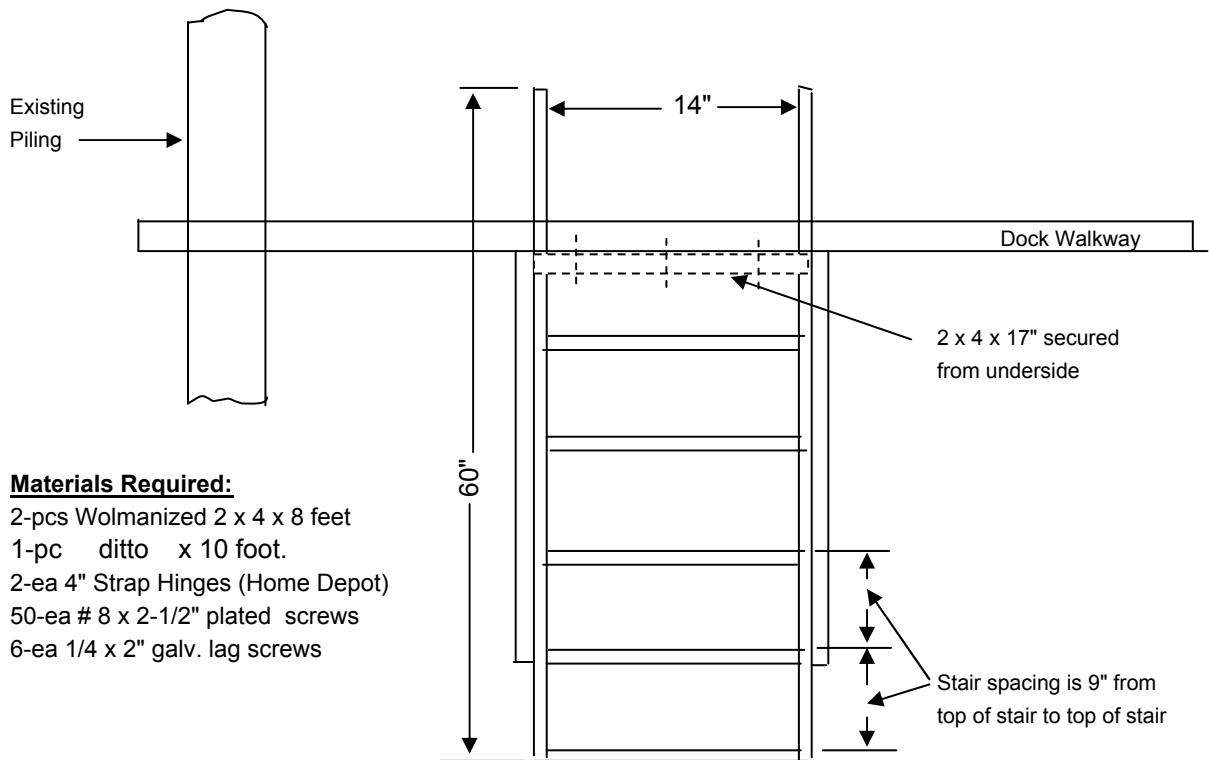

**Materials Required:**

- 2-pcs Wolmanized 2 x 4 x 8 feet
- 1-pc ditto x 10 foot.
- 2-ea 4" Strap Hinges (Home Depot)
- 50-ea # 8 x 2-1/2" plated screws
- 6-ea 1/4 x 2" galv. lag screws

Top of ladder cut on radius (no sharp corners)

2 x 4 Construction

### SIDE VIEW

2 x 4 Ladder legs secured by 3 screws (typical) each end

2 Strap Hinges (one each side) w/ 1/4" Lag screws or bolts & nuts

Dock Walkway


2 x 4 x 17"

Wood Block

Secure brace to bottom of foot walk with 4-ea#8 x 2-1/2" zinc plated screws

2 x 4 Underbraces x 36" long long point to long point cut 45°

2 x 4 cut 45° both ends

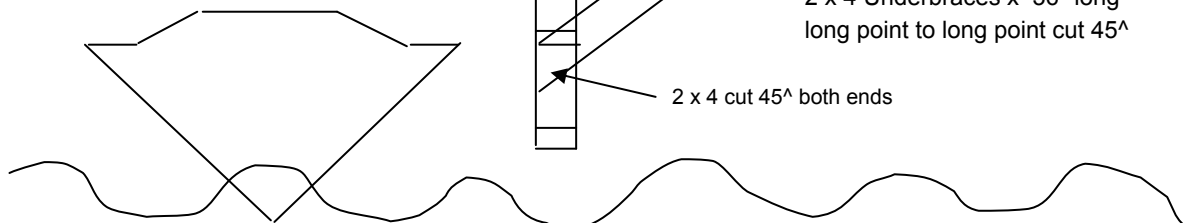

Cut List: 2 x 4's" 5-pcs x 14"; 1-pc x 17"; 2-pcs x 36" cut diagonally (long point to long point) and 2-pcs x 60" (with one end of each piece cut on radius).